

novapress® MULTI II

The high-pressure gasket for use under changing loads.



Material profile

The patented combination of aramide fibres, high-quality graphite filler and particularly oil-resistant nitrile butadiene rubber (NBR) gives novapress® MULTI II the following special properties:

- Gas tightness as specified in the standard
- Excellent stress relaxation
- Excellent safety reserves under changing loads
- High adaptability
- Graphite structure gives the material unique flexibility

Identification colour: blue

novapress® MULTI II is also available with a wire mesh (material no. 25/018) under the name novapress® MULTI II EG.

Application areas

novapress® MULTI II is the ideal choice for use with saturated steam up to 250 °C and 40 bar – it is considered to be – the “steam gasket”. Good resistance to oils, petrol, lubricants and gaseous media make it suitable for other applications as well.

- Power stations (gas and water supply)
- General industry
- Plant engineering and equipment manufacturing
- Chemical industry

Good for people and the environment

FrenzELIT has obtained certification that the company complies with the requirements of both ISO/TS 16949 and ISO 14001. This means complete transparency in all areas and a high degree of security for our customers.

Do you have any questions about your application? The gasket information service will help you:
gaskets@frenzelit.de

GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS




creating
hightech
solutions

Technical information about novapress® MULTI II


Recommendations for use

according to the pressure and temperature

Water/steam

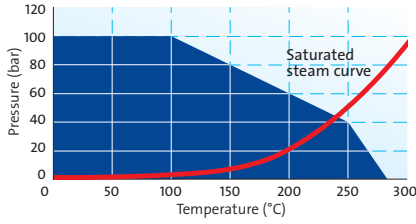

Other Media*


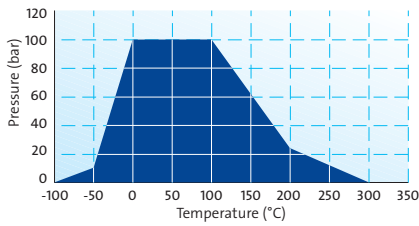


The temperature and pressure recommendations in the graphs apply to gaskets with a thickness of 2.0 mm and smooth flanges. Higher stresses are possible when thinner gaskets are used!
*Example for most common other media. Exact data for specific individual cases are available in the Frenzelit novaDISC programme or contact our application engineering specialists.

Warranty exclusion

In view of the variety of different installation and operation conditions and application and process engineering options, the information given in this prospectus can only provide approximate guidance. There is as a result no basis for warranty claims.

Deformation under temperature 2.0 mm

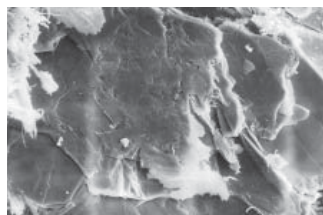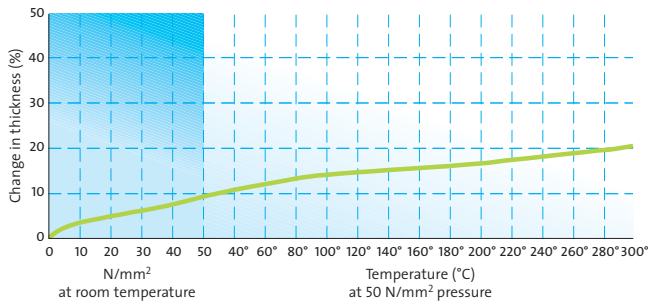

novapress® MULTI II magnified 400 times shows the blend of fibrous and flaky elements and the layering associated with them that leads to the achievement of special slip effects as a precondition for dynamic stress.

Material data

General data

Binders	NBR
Approvals	DVGW, BAM (up to max. 60°C/130 bar)
Colour	both sides blue
Anti-stick coating	both sides A 310
Sheet size and thickness tolerance	according 28 091-1

Physical properties

	Standard	Unity	Value*
Gasket thickness 2.0 mm			
Density	DIN 28 090-2	[g/cm ³]	1.50
Tensile strength	DIN 52 910		
longitudinal		[N/mm ²]	28
transverse		[N/mm ²]	12
Residual stress $\sigma_{dE/16}$	DIN 52 913		
175 °C		[N/mm ²]	32
300 °C		[N/mm ²]	22
Compressibility	ASTM F 36 J	[%]	7
Recovery	ASTM F 36 J	[%]	60
Cold compressibility ϵ_{KSW}	DIN 28 090-2	[%]	6
Cold recovery ϵ_{KRW}	DIN 28 090-2	[%]	3
Hot creep $\epsilon_{WSW/200}$	DIN 28 090-2	[%]	10
Hot recovery $\epsilon_{WRW/200}$	DIN 28 090-2	[%]	2
Recovery R	DIN 28 090-2	[mm]	0.040
Specific leakage rate	DIN 3535-6	[mg/(s·m)]	≤ 0.100
Specific leakage rate $\lambda_{2,0}$	DIN 28 090-2	[mg/(s·m)]	0.100
Fluid resistance	ASTM F 146		
ASTM IRM 903	5h/150°C		
Weight change		[%]	6
Thickness increase		[%]	2
ASTM Fuel B	5h/23°C		
Weight change		[%]	8
Thickness increase		[%]	4
Leachable Chloride content	FZT PV-001-133	[ppm]	≤ 150

* Mode (typical value)

Product data

- Dimensions in mm: 1000 x 1500
1500 x 1500
3000 x 1500
- Thicknesses in mm: 0.3/0.5/0.75/1.0/1.5/2.0/3.0/4.0
- Further dimensions and thicknesses are available on request

GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS

Frenzelit-Werke GmbH & Co. KG
P.O.Box 11 40 · 95456 Bad Berneck · Germany
Phone: +49 9273 72-0 · Fax: +49 9273 72-221
info@frenzelit.de · www.frenzelit.com

 **Frenzelit**

creating
hightech
solutions