


S ES01

TECHNICAL SHEETING

BLACK EPDM 70

FOR TECHNICAL APPLICATIONS EPDM 70
SHEETING

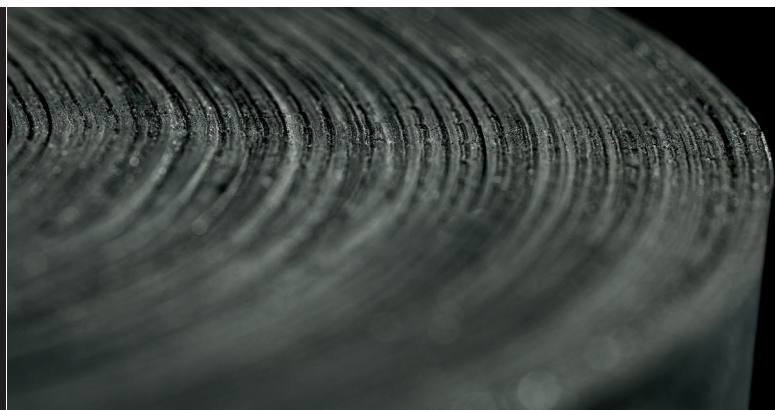

MECHANICAL & PHYSICAL PROPERTIES

MECHANICAL

<i>Rubber Compound</i>	EPDM
<i>Rubber Color</i>	Black
<i>Density</i>	1.26 g/cm ³ ±0.05
<i>Hardness (ISO 48-4)</i>	70±5 Shore A
<i>Tensile strength (ISO 37)</i>	≥7 MPa
<i>Elongation at break (ISO 37)</i>	≥300 %
<i>Tear resistance (ISO 34-1)</i>	≥20 N/mm
<i>Compression set (ISO 815-1)</i>	22h @ 70 °C : ≤30%

TEMPERATURE

<i>Working temperature</i>	-40/+120 °C
----------------------------	-------------

AGEING

<i>Δ Hardness (ISO 188)</i>	70h @ 70 °C : ≤5 Shore A
<i>Δ Tensile strength (ISO 188)</i>	70h @ 70 °C : ≤-15%
<i>Δ Elongation at break (ISO 188)</i>	70h @ 70 °C : ≤-40%
<i>Ozone resistance (ASTM D1149 type A)</i>	200pphm, 48h, 38 °C, 20%: No crack

CHEMICAL RESISTANCE

<i>Diluted acids and bases</i>	Very good
<i>Concentrated acids and bases</i>	Good
<i>Ozone</i>	Very good
<i>Oils and hydrocarbons</i>	Non suitable

FEATURES

- 70 Shore A EPDM.

ADVANTAGES

- Very good resistance to ozone and ageing
- Excellent temperature resistance (-40/+120 °C)
- Excellent resistance to most inorganic or corrosive chemical products
- Highly resistant to mineral acids, detergents, phosphoric ethers, ketones, alcohols, or low molecular weight glycols
- Very good performance with hot water or high pressure steam
- Good mechanical properties
- Matte finish to guarantee a good surface finished quality and to secure an easy unrolling.

APPLICATIONS

- Gaskets or washers cutting and manufacturing of pieces for general industrial purpose applications in contact with water, oxidizing and non oxidizing diluted acids.

MAINTENANCE RECOMMENDATION

- Always follow manufacturer warnings and instructions when using any cleaning product.

**Asbestos
FREE**

**Halogen
FREE**

**RoHS
compliant**

**REACH
compliant**

FOR TECHNICAL APPLICATIONS EPDM 70 SHEETING

S ES01

BLACK EPDM 70

DIMENSIONS

Article number	Stock Situation	Thickness (mm)	Width (mm)	Length (mm)	Weight	Side 1 finish	Side 2 finish	Type of insertion	Number Of Insertions	Inner car-board tube Ø mm
S70010101M	STD STOCK	1	1400 ±2%	20000 ±2%	1.310	Matt	Smooth	-	0	80 mm
S70010151M	STD STOCK	1,5	1400 ±2%	15000 ±2%	1.960	Matt	Smooth	-	0	80 mm
S70010201M	STD STOCK	2	1400 ±2%	15000 ±2%	2.620	Matt	Smooth	-	0	80 mm
S70010301M	STD STOCK	3	1400 ±2%	10000 ±2%	3.930	Matt	Smooth	-	0	80 mm
S70010401M	STD STOCK	4	1400 ±2%	10000 ±2%	5.240	Matt	Smooth	-	0	80 mm
S70010501M	STD STOCK	5	1400 ±2%	10000 ±2%	6.550	Matt	Smooth	-	0	
SMES0100006002	STD STOCK	6	1400 ±2%	10000 ±2%	7.780	Matt	Smooth	-	0	
SMES0100008005	STD STOCK	8	1400 ±2%	5000 ±2%	10.380	Matt	Smooth	-	0	
SMES0100010007	STD STOCK	10	1400 ±2%	5000 ±2%	13.100	Matt	Smooth	-	0	

IDENTIFICATION

Labelling

Self-adhesive label indicating product name, dimensions, area in m², nominal weight, and product code to allow product traceability. (94/62/EC - LDPE4)

Wrapping

Black polyethylene film.(94/62/EC - LDPE4)

Packaging

Thickness ≤6mm rolled on cardboard tube Ø 80mm. Thickness >6mm in roll.

Unless typographical error, information and figures of our technical datasheet are based on our experience and laboratory tests according to international standards. This data is intended to be used as a guideline only. Material performance depends on the conditions of use and the final application.