

novapress® BASIC

The high-pressure gasket for **standard applications.**



Material profile

The balanced raw material combination, consisting of high-quality aramide fibres, special fillers and nitrile-butadiene-rubber (NBR), gives novapress® BASIC the following special properties:

- **Good media resistance**
- **Good stress relaxation**
- **High pressure resistance**
- **Excellent value for money**

Identification colour: orange

Application areas

novapress® BASIC is the ideal choice for use under average temperature and pressure conditions.

- **Sanitary engineering
(gas and water supply)**
- **Pipeline construction**
- **Plant engineering**
- **Machine manufacturing**

Good for people and the environment

Frenzelit has obtained certification that the company complies with the requirements of both ISO/TS 16949 and ISO 14001. This means complete transparency in all areas and a high degree of security for our customers.

Do you have any questions about your application? The gasket information service will help you:
gaskets@frenzelit.de

GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS




creating
hightech
solutions

Technical information about novapress® BASIC


Recommendations for use

according to the pressure and temperature

Water/steam

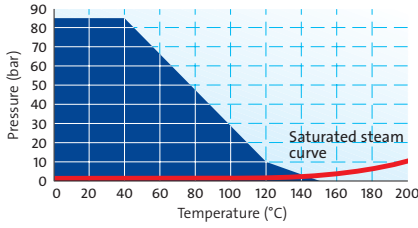

Other Media*

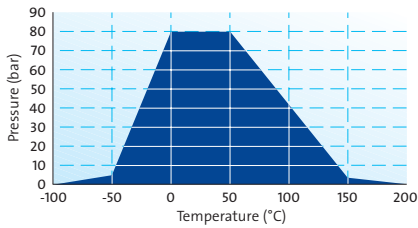


The temperature and pressure recommendations in the graphs apply to gaskets with a thickness of 2.0 mm and smooth flanges. Higher stresses are possible when thinner gaskets are used!

*Example for the most common other media. Exact data for specific individual cases are available in the Frenzelit novaDISC programme or contact our application engineering specialists.

Warranty exclusion

In view of the variety of different installation and operation conditions and application and process engineering options, the information given in this prospectus can only provide approximate guidance. There is as a result no basis for warranty claims.

Deformation under temperature 2.0 mm

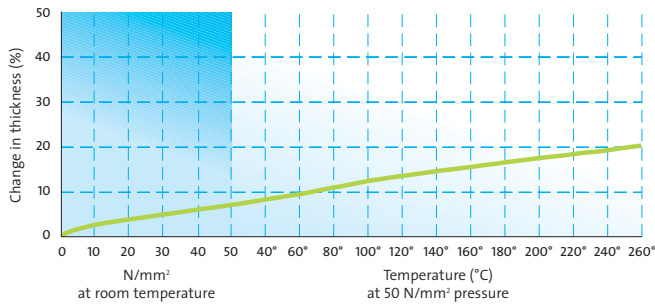

Material data

General data

Binders	NBR
Approvals	DVGW, SVGW, HTB, KTW, VP-401, WRC
Colour	both sides orange
Anti-stick coating	serially one side anti-stick coating
Sheet size and thickness tolerance	according DIN 28 091-1

Physical properties

	Standard	Unity	Value*
Gasket thickness 2.0 mm			
Density	DIN 28 090-2	[g/cm³]	1.75
Tensile strength	DIN 52 910		
longitudinal		[N/mm²]	14
transverse		[N/mm²]	6
Residual stress $\sigma_{dE/16}$	DIN 52 913		
175 °C		[N/mm²]	30
300 °C		[N/mm²]	17
Compressibility	ASTM F 36 J	[%]	8
Recovery	ASTM F 36 J	[%]	60
Cold compressibility ϵ_{KSW}	DIN 28 090-2	[%]	8
Cold recovery ϵ_{KRW}	DIN 28 090-2	[%]	3
Hot creep $\epsilon_{WSW/200}$	DIN 28 090-2	[%]	22
Hot recovery $\epsilon_{WRW/200}$	DIN 28 090-2	[%]	2
Recovery R	DIN 28 090-2	[mm]	0.040
Specific leakage rate	DIN 3535-6	[mg/(s·m)]	≤ 0.100
Specific leakage rate $\lambda_{2,0}$	DIN 28 090-2	[mg/(s·m)]	0.100
Fluid resistance	ASTM F 146		
ASTM IRM 903	5h/150°C		
Weight change		[%]	7
Thickness increase		[%]	2
ASTM Fuel B	5h/23°C		
Weight change		[%]	7
Thickness increase		[%]	4
Leachable Chloride content	FZT PV-001-133	[ppm]	≤ 150

* Mode (typical value)

Product data

- Dimensions in mm: 1000 x 1500
1500 x 1500
3000 x 1500
- Thicknesses in mm: 0.3/0.5/0.75/1.0/1.5/2.0/3.0/4.0
- Further dimensions and thicknesses are available on request

GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS

Frenzelit-Werke GmbH & Co. KG
P.O.Box 11 40 · 95456 Bad Berneck · Germany
Phone: +49 9273 72-0 · Fax: +49 9273 72-221
info@frenzelit.de · www.frenzelit.com

 **Frenzelit**

creating
hightech
solutions